



UNITREK DIMMABLE STR9017/15TC - 15W

Single circuit, dimmable 15 watt architectural track spot, with integral driver

Application


Ideal for decorative retail or interior residential spaces

Design Specifications

- Durable Polyamide body profile, colour white or black
- High output LED optics, CRI >80, selectable CCT 3000K / 4000K / 5700K
- Polycarbonate lens, 40° beam distribution
- 15 watt integral trailing edge dimmable driver
- Optional black or white baffle available

Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**

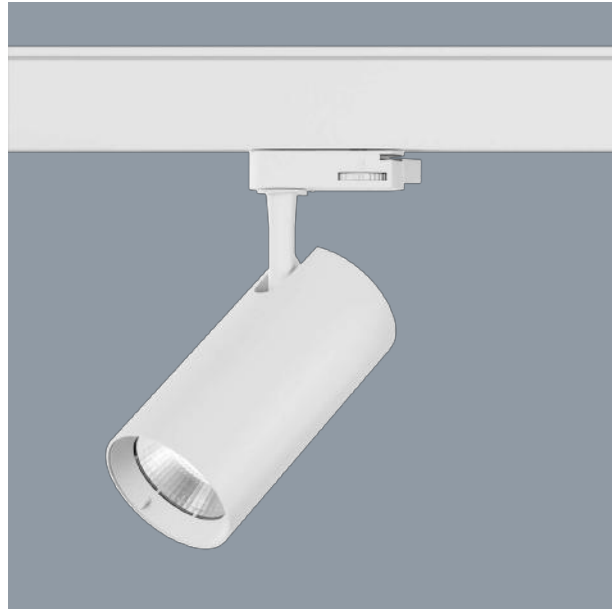


Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Body Colour
	STR9017/15TC/WH	240	15	1000/1150/1100	3000/4000/5700	WHITE
	STR9017/15TC/BK	240	15	1000/1150/1100	3000/4000/5700	BLACK
	STR9017/15RING/BK					BLACK RING INSERT
	STR9017/15RING/WH					WHITE RING INSERT
	STR9017/15R60P					60 DEG BEAM INSERT

CRI	Beam Angle (°)	Dimmable	Dim (mm)
80	40	YES	70(W) x 140(H)
80	40	YES	70(W) x 140(H)
	40		
	40		
	60		

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

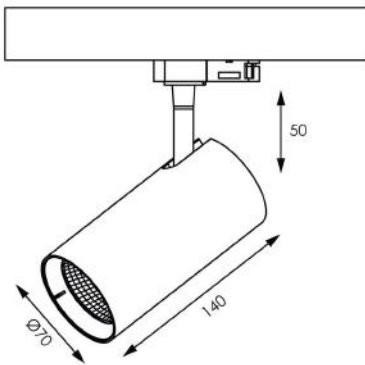

Photometric Data

Unit: cd C0/C180 — C90/C270 —

STR9017/15W/NDL at 5000K



WHO NEEDS AN OLD TIMER CONTROL.

PIXIE SMART GPO IS SMARTER THAN THE REST.

MULTIFUNCTION
CONTROL



For more
information
please
scan me

