



## UFO II SHB25HE - 80/180W

Dimmable 1-10V, IP65 LED multi function highbay or lowbay

### Application

Ideal for any commercial or industrial interior space

### Design Specifications

- Multi-function highbay or lowbay with optional quick connect CorridorSTANDBY dimming sensor
- Die-cast aluminium body, black powder coat finish
- High efficiency SMD LED optics
- Clear polycarbonate lens, 120° lens
- Integral 1-10V dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex and plug for easy installation
- Wide selection of optional mounting, optical and control accessories, including a DALI 24V signal converter to 1-10V



### Performance

- Dimmable - **YES**
- Dimmer Type - **1-10V or SAL DALI SIGNAL CONVERTER**

### Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	CRI
SHB25HE80CW	240	80	12000	4000	120	80
SHB25HE120CW	240	120	18000	4000	120	80
SHB25HE180CW	240	180	27000	4000	120	80
SHB25HES/RC						
LM-DALI0108						

Body Colour	Dim (mm)	Mass (kg)
BLACK	320(W) x 252(H)	3.3
BLACK	320(W) x 252(H)	3.5
BLACK	320(W) x 267(H)	4

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions


SHB25 ACCESSORY COMPATIBILITY TABLE - MAY 2020

ACCESSORY	SHB25/120PFD	SHB25/120PFP	SHB25/120PLB	SHB25/120PMR	SHB25/120P90	SHB25/180P60	SHB25/180PFD	SHB25/180PFP	SHB25/180PLB
MODEL									
SHB25/80	YES	YES	YES	YES	YES				
SHB25/120	YES	YES	YES	YES	YES				
SHB25/180						YES	YES	YES	YES
SHB25HE/80	YES		YES	YES					
SHB25HE/120	YES		YES	YES					
SHB25HE/180	YES		YES	YES					


## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

SHB25HE80 at 5700K

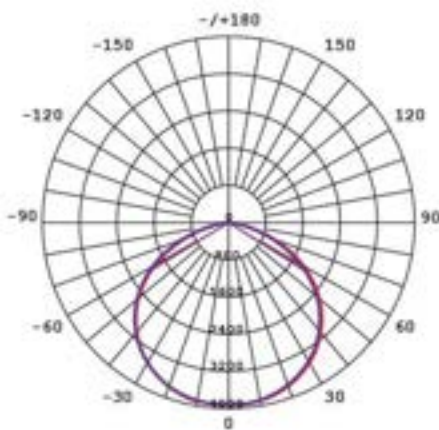

SHB25HE120 at 5700K

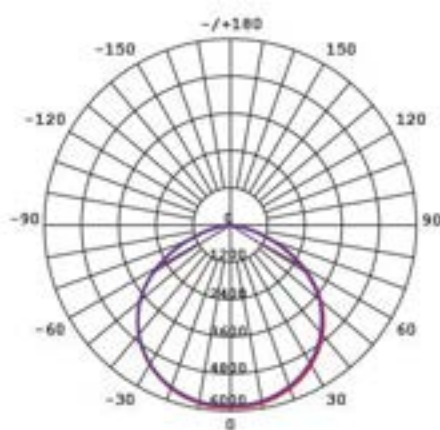

## Product Images



Clear polycarbonate reflector  
SHB25HE120PFP  
SHB25HE180PFP



DALI signal converter  
UM-DAL0108



Remote control  
SHB25HE18C



Daylight harvesting sensor  
SM241



**Accessories**



Bracket for Low Bay  
S4825H120P18  
S4825H180P18



Metal reflector  
S4825H120P18  
S4825H180P18



LED sensor  
S4825H120P18