



BUNKER 15 OVAL SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior spaces

Design Specifications

- Durable UV resistant white polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt.
- CRI > 80, 1050lm
- Quick connect installation design
- Robust IK06 protection
- Double insulation




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL7271CW/WH	240	15	1050	4000	80

Beam Angle (°)	Body Colour	Dim (mm)
110	WHITE	233(L) x 133(W) x 68(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

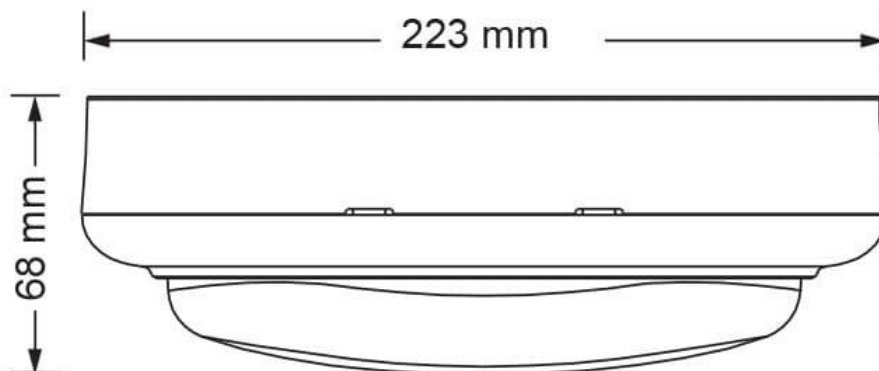



Photometric Data

Unit: cd C0/C180 — C90/C270 —





PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more
information
please
scan me

