



# TRILOGY PROJECT LED DOWNLIGHT



220-240V  
AC

8W  
800lm

TRI-COLOUR  
CCT

100°  
BEAM  
SPREAD

DIMMING

90mm

IC-F  
ABUTTED &  
COVERED

IC-4

3YR  
WARRANTY

**An 8W dimmable LED fixed downlight ideal for large projects. Its high lumen output of up to 800lm make it both energy efficient and bright, it is cost effective solution with outstanding performance.**

- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4200K to natural light 5000K.
- Matt white housing with frost white diffuser
- Flush frame design for a seamless look.
- IP44 rated - Front Fascia ONLY
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- SAA approved with integrated dimmable driver.

## APPLICATIONS

- Ideal for any residential or commercial interior space





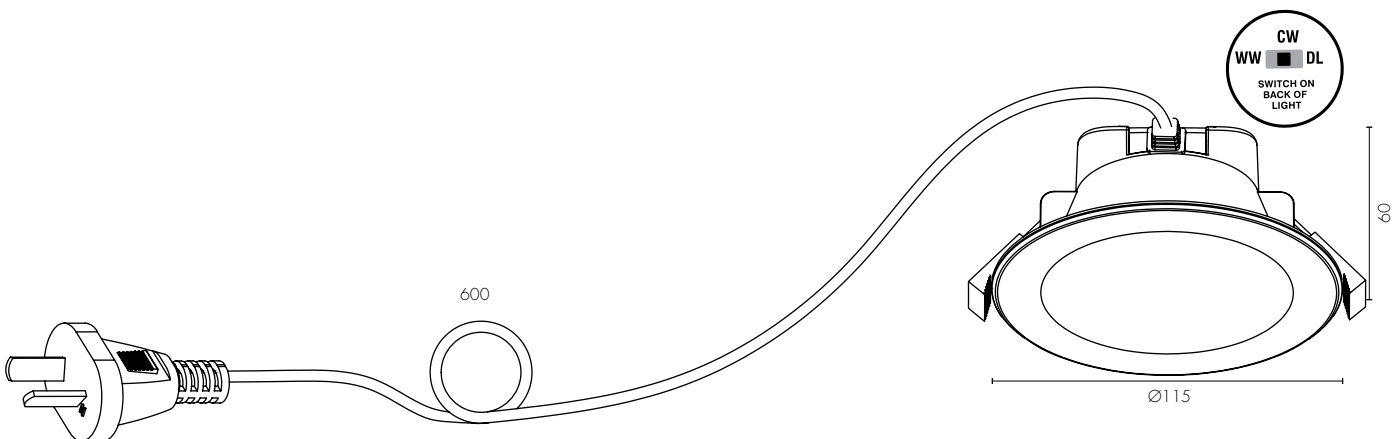
# TRILOGY PROJECT LED DOWNLIGHT



## TECHNICAL SPECIFICATIONS

<b>Operating voltage:</b>	220-240V / 50Hz
<b>Class:</b>	Class II (2)
<b>Wattage:</b>	8W Total
<b>Lumens:</b>	700 Total lumens (3000K) 800 Total lumens (4000K) 750 Total lumens (5000K)
<b>Colour temperature:</b>	3000°K (Warm white) 4000°K (Cool white) 5000°K (Natural)
<b>Beam angle:</b>	100 degrees
<b>Colour rendering index:</b>	≥ 82
<b>Power factor:</b>	≥ 0.90
<b>Dimmable:</b>	Yes
<b>Rated lifetime:</b>	30,000hrs @25°C Ambient (When covered with thermal insulation)
<b>Construction:</b>	ABS, aluminium and PC Diffuser
<b>Operating temperature:</b>	TA: 25 degrees Celsius
<b>Warranty:</b>	3 year replacement
<b>Standards:</b>	AS/NZS 60598.1 AS/NZS 60598.2.2

## INSTALLATION

Must be installed by a licensed electrician



	MODEL	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
<b>RETAIL BOX</b>	21755/05	White	Trilogy Project LED Downlight	W119 x H75 x D119 mm	0.22 kg	1 pc	 9 312641 217558 >
<b>OUTER CTN</b>	21755/05	White	Trilogy Project LED Downlight				 19312641217555